

**PTFE gasket material** • structured PTFE sheets • multidirectionally exp. PTFE sheets • multidirectionally exp. PTFE tapes • monodirectionally exp. PTFE tapes • **Braided gland packings** • Carbon / Graphite packings • PTFE packings • PTFE / Aramid packings • Aramid packings • Glass packings • Acrylic packings • Ramie packings • Polyimid packings • Novoloid packings • Nomex packings • Preformed packing rings • **Compressed fibre sheets** • Carbon / Graphite / NBR • Aramid /NBR • Cellulose / NBR • **Graphite sheets** • Graphite sheets with plain metal insert • Graphite sheets with tanged metal insert • Pure graphite sheets • **Gaskets** • PTFE envelope gaskets • Cut gaskets • Gaskets with metal eyelets • Double jacketed gaskets • Spiral-wound gaskets • Kammprofile gaskets • Hand- and manhole gaskets • Tank lid gaskets • Braided gasket tapes • **Jampak** • Injection gun • Jampak injectable compounds • Seal-Cage-System • **Expansion Joints** • Metallic and Non-Metallic Expansion Joints • **Accessories** • Various packing cutters • Packing extractors • Circular gasket cutter • **and many more...**

[www.teadit.eu](http://www.teadit.eu)



**TEADIT® International Produktions GmbH**  
 Europastraße 12, 6322 Kirchbichl, Tirol/Austria  
 Tel.: +43 5332 74000, [austria@teadit.eu](mailto:austria@teadit.eu)

Houston (USA), Rio de Janeiro (Brazil), Campinas (Brazil),  
 Buenos Aires (Argentina), Shanghai (China), Vadodara (India)

The contents and presentation of this catalogue are the property of TEADIT® Austria, and protected under the Copyright act. Reproducing, copying or translation of the contents and diagrams is strictly prohibited unless permitted by TEADIT®.

Since all properties, specifications and application parameters shown throughout this catalogue are approximate and may be mutually influenced, your specific application should not be undertaken without independent study and evaluation for suitability. All technical data and advice given is based on experiences TEADIT® has made so far. Failure to select proper sealing products can result in damage and/or personal injury. Properties, specifications and application parameters are subject to change without notice. TEADIT® does not undertake any liability of any kind whatsoever.

MARCH 2022 - TEADIT® 460137



## 28LS-LE - HIGH PERFORMANCE FLAT GASKET MADE OF EXPANDED PTFE WITH DIFFUSION BARRIER

For all types of flanges in the  
 Chemical Process and Food & Pharma Industry





Sealing for a safer and greener tomorrow

# TEADIT® 28LS-LE is a high performance flat gasket with maximum tightness at minimum gasket load!

TEADIT® 28LS-LE is a new generation of gaskets produced from 100 % pure, multi-directionally expanded PTFE. The biocompatible gaskets are designed for use in the pharmaceutical, chemical and food industry.

TEADIT® 28LS-LE is equipped with a diffusion barrier applied by a proprietary thermal and mechanical process. The inner bore of the TEADIT® 28 LS-LE gasket is enhanced with a diffusion barrier without any additional filler or other material, to avoid cross section leakage at low gasket stress.

Therefore TEADIT® 28 LS-LE achieves high tightness with low bolt load.

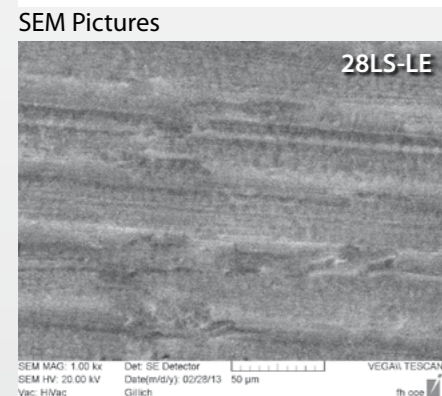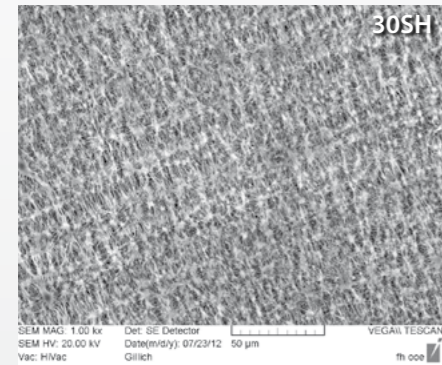

## ADVANTAGES KEY FEATURES

- Universally employable gaskets for all piping applications.
- Suitable for all types of flanges and nearly all media.
- Exceptional mechanical strength which allows operation with minimal creep at elevated temperatures.
- The diffusion barrier on the inner diameter significantly increases the sealability of the gaskets and stops cross contamination and migration.
- Manufactured according to GMP requirements, with full supply chain integrity and traceability. FDA and EC 1935/2004 certificates, issued by the Fraunhofer Institute, confirm its usability in the food and pharmaceutical Industry.
- Inherently clean and suitable for CIP/SIP cycling.
- GMP compliant and protected by a plastic bag from environmental contamination. Packaging printed with a batch number for material tracking.
- Gaskets can be easily identified by the embossed labelling.


## IDEAL FOR MANY FLANGE TYPES

- Glass lined
- FRP (fibre reinforced plastics)
- Glass
- Plastic
- Also suitable for metal flanges


# TEADIT® 28LS-LE High-purity ePTFE gaskets with diffusion barrier

## Leakagerate

loading curve  
unloading curve  
Qmin/Qsmin

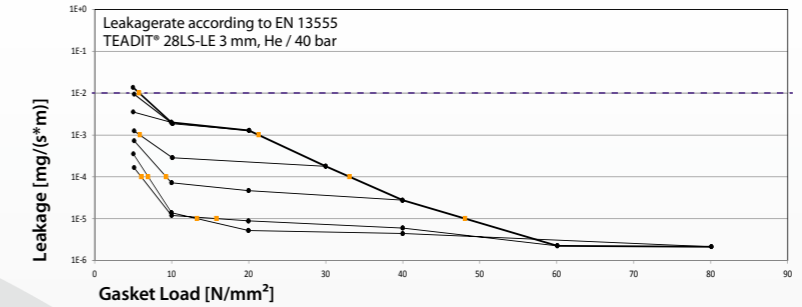


TA-Luft  
VDI 2290 specification

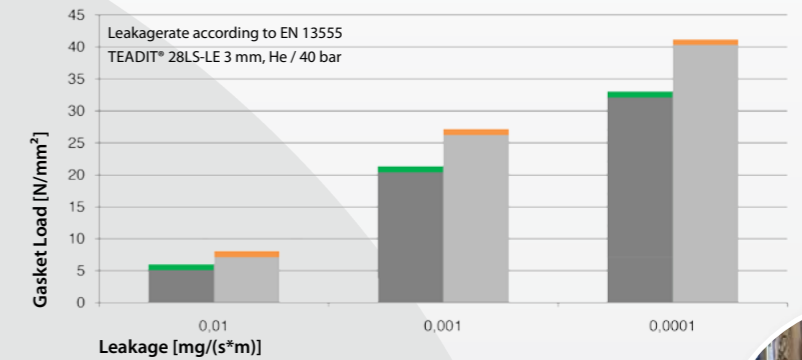

Leakagerate TEADIT® 28LS-LE (green) vs Low Load Gasket Competitor (orange)

Leakagerate TEADIT® 28LS-LE (green) vs ePTFE Material without diffusion barrier (orange)

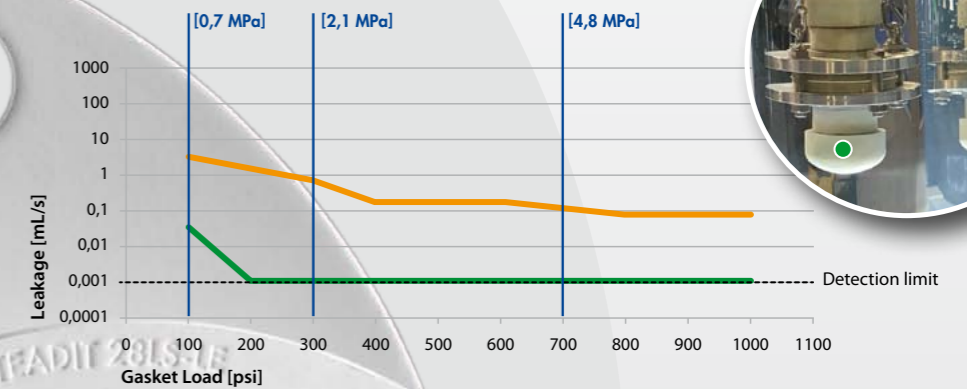

# Low Stress for Low Emission



## MAIN APPROVALS

- FDA 21 CFR 177.1550, EC 1935/2004 and EU 10/2011
- USP Plastic Class VI
- TA Luft and Blow Out Test



## GMP COMPLIANT PACKAGING

- Max 2 gaskets in one plastic bag
- Plastic bags packed in a cardboard

## APPLICATION CONDITIONS

- Temp.** -268° C up to +260° C
- PH** 0-14 (exceptions are molten alkali metals and elemental fluorine)
- Press.** From Vacuum up to 200 bar

## STANDARD DIMENSIONS

- Thickness: 3.0 and 6.0 mm
- DIN EN 1514 DN10 - DN800 and PN 2,5 - PN 40 in IBC
- ASME B 16.21 #150 in 1/2" - 24" for RF & FF

TEADIT® International Produktions GmbH, Europastraße 12 - 6322 Kirchbichl/Austria  
Tel.: +43 5332 74000, austria@teadit.eu

www.teadit.eu

**TEADIT®**  
Sealing for a safer and greener tomorrow